PARABOLIC DIVERSION DESIGN, WITHOUT FREEBOARD

RETARDANCE - D & C
GRADE, % - 0.25

V_1 Based on Permissible Velocity of the Soil With Retardance "D"
Top Width, Depth & V_2 Based on Retardance "C"

Q	V_1 = 2.0			V_1 = 2.5			V_1 = 3.0			V_1 = 3.5			V_1 = 4.0			V_1 = 4.5			V_1 = 5.0			V_1 = 5.5			V_1 = 6.0		
cfs	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2
15																											
20																											
25	10	2.4	1.6																								
30	11	2.3	1.7																								
35	13	2.3	1.7																								
40	15	2.3	1.8	10	2.7	2.1																					
45	17	2.2	1.8	12	2.6	2.2																					
50	19	2.2	1.8	13	2.6	2.2																					
55	20	2.2	1.8	14	2.6	2.3																					
60	22	2.2	1.8	15	2.5	2.3																					
65	24	2.2	1.8	17	2.5	2.3																					
70	26	2.2	1.9	18	2.5	2.3	13	3.1	2.7																		
75	28	2.2	1.9	19	2.5	2.4	13	3.0	2.8																		
80	29	2.2	1.9	20	2.5	2.4	14	3.0	2.8																		
90	33	2.2	1.9	23	2.5	2.4	16	3.0	2.8																		
100	37	2.2	1.9	25	2.5	2.4	18	3.0	2.9																		
110	40	2.2	1.9	28	2.5	2.4	19	2.9	2.9																		
120	44	2.2	1.9	30	2.5	2.4	21	2.9	2.9	15	3.6	3.3															
130	48	2.2	1.9	33	2.5	2.4	23	2.9	2.9	16	3.6	3.3															
140	51	2.2	1.9	35	2.5	2.4	25	2.9	2.9	18	3.5	3.4															
150	55	2.2	1.9	37	2.5	2.4	26	2.9	2.9	19	3.5	3.4															
160	58	2.2	1.9	40	2.5	2.4	28	2.9	3.0	20	3.5	3.4															
170	62	2.2	1.9	42	2.5	2.4	30	2.9	3.0	21	3.5	3.4	17	4.0	3.8												
180	66	2.2	1.9	45	2.5	2.4	31	2.9	3.0	22	3.5	3.5	18	4.0	3.8												
190	69	2.2	1.9	47	2.5	2.4	33	2.9	3.0	24	3.5	3.5	19	4.0	3.9												
200	73	2.2	1.9	50	2.5	2.4	35	2.9	3.0	25	3.4	3.5	19	3.9	3.9												
220	80	2.2	1.9	55	2.5	2.4	38	2.9	3.0	27	3.4	3.5	21	3.9	3.9												
240	87	2.2	1.9	60	2.5	2.5	42	2.9	3.0	30	3.4	3.6	23	3.9	4.0												
260	95	2.2	1.9	65	2.5	2.4	45	2.9	3.0	32	3.4	3.5	25	3.9	4.0	20	4.6	4.3									
280				69	2.5	2.5	49	2.9	3.0	35	3.4	3.6	27	3.9	4.0	21	4.6	4.3									
300				74	2.5	2.5	52	2.9	3.0	37	3.4	3.6	29	3.8	4.1	22	4.5	4.4									

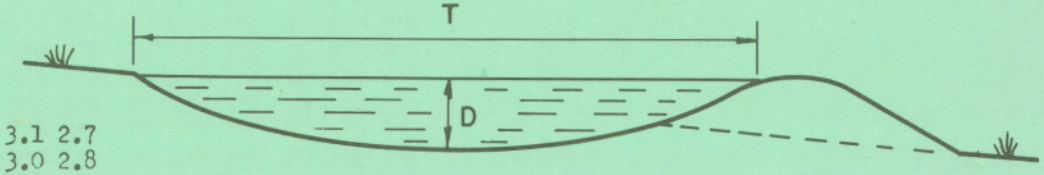

T = Top width, Retardance "C"
D = Flow depth, Retardance "C"
V_1 = Permissible velocity, Retardance "D"
V_2 = Velocity, Retardance "C"

T and D are the dimensions required to carry the design flow. Add freeboard and allowance for settlement as necessary.

Exhibit 9-2.1

9-20.5

REFERENCE
SCS - TP - 61

U. S. DEPARTMENT OF AGRICULTURE
SOIL CONSERVATION SERVICE
ENGINEERING & WATERSHED PLANNING UNIT
UPPER DARBY, PENNSYLVANIA

RTSC - NE - ENG. 915
SHEET 1 OF 6

PARABOLIC DIVERSION DESIGN, WITHOUT FREEBOARD

RETARDANCE - D & C
GRADE, % - 0.50

V_1 Based on Permissible Velocity of the Soil With Retardance "D"
Top Width, Depth & V_2 Based on Retardance "C"

Q	V_1 = 2.0			V_1 = 2.5			V_1 = 3.0			V_1 = 3.5			V_1 = 4.0			V_1 = 4.5			V_1 = 5.0			V_1 = 5.5			V_1 = 6.0		
cfs	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2
15	9	1.6	1.6																								
20	11	1.6	1.7																								
25	14	1.6	1.7	9	1.9	2.1																					
30	17	1.6	1.7	11	1.9	2.2	8	2.2	2.5																		
35	20	1.6	1.7	12	1.9	2.3	9	2.1	2.6																		
40	22	1.6	1.7	14	1.8	2.3	11	2.1	2.7																		
45	25	1.5	1.7	16	1.8	2.3	12	2.0	2.8																		
50	28	1.5	1.7	18	1.8	2.4	13	2.0	2.8	10	2.4	3.2															
55	31	1.5	1.7	19	1.8	2.4	15	2.0	2.8	11	2.4	3.3															
60	33	1.5	1.7	21	1.8	2.4	16	2.0	2.8	11	2.4	3.3															
65	36	1.5	1.8	23	1.8	2.4	17	2.0	2.9	12	2.4	3.3															
70	39	1.5	1.7	24	1.8	2.4	18	2.0	2.9	13	2.3	3.4															
75	42	1.5	1.8	26	1.8	2.4	19	2.0	2.9	14	2.3	3.4	11	2.7	3.7												
80	44	1.5	1.8	28	1.8	2.4	21	2.0	2.9	15	2.3	3.4	12	2.7	3.8												
90	50	1.5	1.8	31	1.8	2.4	24	2.0	2.9	17	2.3	3.4	13	2.7	3.8												
100	55	1.5	1.8	35	1.8	2.4	26	2.0	2.9	19	2.3	3.5	15	2.6	3.9	12	3.0	4.1									
110	61	1.5	1.8	38	1.8	2.4	29	2.0	2.9	21	2.3	3.5	16	2.6	3.9	13	3.0	4.2									
120	66	1.5	1.8	42	1.8	2.4	31	2.0	2.9	22	2.3	3.5	18	2.6	3.9	14	2.9	4.3									
130	72	1.5	1.8	45	1.8	2.4	34	2.0	2.9	24	2.3	3.5	19	2.6	4.0	15	2.9	4.4									
140	77	1.5	1.8	48	1.8	2.4	36	2.0	2.9	26	2.3	3.5	20	2.6	4.0	16	2.9	4.3									
150	83	1.5	1.8	52	1.8	2.4	39	2.0	2.9	28	2.3	3.5	22	2.6	4.0	18	2.9	4.4	14	3.3	4.8						
160	88	1.5	1.8	55	1.8	2.4	41	2.0	2.9	30	2.3	3.5	23	2.6	4.0	19	2.9	4.4	15	3.3	4.8						
170	93	1.5	1.8	59	1.8	2.4	44	2.0	2.9	32	2.3	3.6	25	2.6	4.0	20	2.9	4.4	16	3.3	4.9						
180	99	1.5	1.8	62	1.8	2.4	47	2.0	2.9	33	2.3	3.6	26	2.6	4.0	21	2.9	4.5	17	3.3	4.9						
190				65	1.8	2.4	49	2.0	2.9	35	2.3	3.6	28	2.6	4.0	22	2.9	4.5	18	3.3	5.0						
200				69	1.8	2.4	52	2.0	2.9	37	2.3	3.6	29	2.6	4.0	23	2.9	4.5	18	3.3	5.0	15	3.7	5.2			
220				76	1.8	2.4	57	2.0	2.9	41	2.3	3.6	32	2.6	4.0	25	2.9	4.5	20	3.2	5.0	17	3.7	5.4			
240				82	1.8	2.5	62	2.0	2.9	44	2.3	3.6	45	2.5	4.1	28	2.9	4.5	22	3.2	5.0	18	3.7	5.4			
260				89	1.8	2.5	67	2.0	2.9	48	2.3	3.6	38	2.6	4.1	30	2.9	4.5	24	3.2	5.1	20	3.6	5.4			
280				96	1.8	2.5	72	2.0	3.0	52	2.3	3.6	40	2.5	4.1	32	2.8	4.6	26	3.2	5.1	21	3.6	5.5	18	4.1	5.8
300							77	2.0	3.0	55	2.3	3.6	43	2.5	4.1	35	2.8	4.6	27	3.2	5.2	23	3.6	5.5	19	4.1	5.8

Exhibit 9-2.1

REFERENCE
SCS - TP - 61

U. S. DEPARTMENT OF AGRICULTURE
SOIL CONSERVATION SERVICE
ENGINEERING & WATERSHED PLANNING UNIT
UPPER DARBY, PENNSYLVANIA

RTSC - NE - ENG.
915
SHEET 2 OF 6

PARABOLIC DIVERSION DESIGN, WITHOUT FREEBOARD

RETARDANCE - D & C
GRADE, % - 0.75

V_1 Based on Permissible Velocity of the Soil With Retardance "D"
Top Width, Depth & V_2 Based on Retardance "C"

Q	V_1 = 2.0			V_1 = 2.5			V_1 = 3.0			V_1 = 3.5			V_1 = 4.0			V_1 = 4.5			V_1 = 5.0			V_1 = 5.5			V_1 = 6.0		
cfs	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2
15	12	1.3	1.5	7	1.6	2.0																					
20	16	1.3	1.5	9	1.5	2.2																					
25	19	1.3	1.5	11	1.5	2.2	8	1.7	2.6																		
30	23	1.3	1.5	13	1.5	2.2	10	1.7	2.7	8	1.9	3.0															
35	27	1.3	1.5	15	1.5	2.3	11	1.7	2.7	9	1.9	3.1															
40	31	1.3	1.5	18	1.5	2.3	13	1.7	2.8	10	1.9	3.2															
45	35	1.3	1.6	20	1.5	2.3	14	1.7	2.8	11	1.8	3.2															
50	38	1.3	1.6	22	1.5	2.3	16	1.6	2.9	13	1.8	3.3	9	2.2	3.7												
55	42	1.3	1.6	24	1.5	2.3	18	1.6	2.9	14	1.8	3.3	10	2.1	3.8												
60	46	1.3	1.6	26	1.5	2.3	19	1.6	2.8	15	1.8	3.3	11	2.1	3.8												
65	50	1.3	1.6	28	1.5	2.3	21	1.6	2.9	16	1.8	3.3	12	2.1	3.8	10	2.4	4.1									
70	53	1.3	1.6	30	1.5	2.3	22	1.6	2.9	17	1.8	3.3	13	2.1	3.8	11	2.4	4.2									
75	57	1.3	1.6	33	1.5	2.3	24	1.6	2.9	19	1.8	3.3	14	2.1	4.0	11	2.3	4.2									
80	61	1.3	1.6	35	1.5	2.3	25	1.6	2.9	20	1.8	3.4	15	2.1	4.0	12	2.3	4.3									
90	68	1.3	1.6	39	1.5	2.3	28	1.6	2.9	22	1.8	3.4	16	2.1	4.0	13	2.3	4.4	11	2.6	4.6						
100	76	1.3	1.6	43	1.5	2.3	32	1.6	2.9	25	1.8	3.4	18	2.1	4.0	15	2.3	4.4	12	2.6	4.8						
110	83	1.3	1.6	48	1.5	2.3	35	1.6	2.9	27	1.8	3.4	20	2.0	4.0	16	2.3	4.5	13	2.6	4.8						
120	91	1.3	1.6	52	1.5	2.3	38	1.6	2.9	30	1.8	3.4	22	2.1	4.0	18	2.3	4.4	15	2.5	4.8	12	2.9	5.2			
130	98	1.3	1.6	56	1.5	2.4	41	1.6	2.9	32	1.8	3.4	23	2.1	4.0	19	2.2	4.5	16	2.5	4.9	13	2.8	5.3			
140				60	1.5	2.4	44	1.6	2.9	34	1.8	3.4	25	2.0	4.1	21	2.3	4.5	17	2.5	4.9	14	2.8	5.3			
150				65	1.5	2.4	47	1.6	2.9	37	1.8	3.4	27	2.0	4.1	22	2.2	4.5	18	2.5	4.9	15	2.8	5.3			
160				69	1.5	2.4	50	1.6	2.9	39	1.8	3.4	29	2.0	4.1	24	2.2	4.5	19	2.5	4.9	16	2.8	5.4	13	3.1	5.8
170				73	1.5	2.4	53	1.6	2.9	42	1.8	3.4	30	2.0	4.1	25	2.2	4.5	20	2.5	5.0	17	2.8	5.4	14	3.1	5.8
180				77	1.5	2.4	56	1.6	2.9	44	1.8	3.4	32	2.0	4.1	27	2.2	4.5	22	2.5	5.0	18	2.8	5.5	15	3.1	5.9
190				82	1.5	2.4	60	1.6	2.9	47	1.8	3.4	34	2.0	4.1	28	2.2	4.6	23	2.5	5.0	19	2.8	5.5	16	3.1	5.9
200				86	1.5	2.4	63	1.6	3.0	49	1.8	3.4	36	2.0	4.1	29	2.2	4.5	24	2.5	5.0	20	2.7	5.5	16	3.1	5.9
220				94	1.5	2.4	69	1.6	3.0	54	1.8	3.4	39	2.0	4.1	32	2.2	4.6	26	2.5	5.1	22	2.7	5.5	18	3.1	5.9
240							75	1.6	3.0	59	1.8	3.4	43	2.0	4.1	35	2.2	4.6	29	2.5	5.0	24	2.7	5.6	19	3.1	6.0
260							81	1.6	3.0	64	1.8	3.4	46	2.0	4.1	38	2.2	4.6	31	2.5	5.1	26	2.7	5.6	21	3.1	6.1
280							87	1.6	3.0	68	1.8	3.4	50	2.0	4.1	41	2.2	4.6	33	2.5	5.1	27	2.7	5.7	23	3.0	6.1
300							93	1.6	3.0	73	1.8	3.5	53	2.0	4.1	44	2.2	4.6	36	2.5	5.1	29	2.7	5.6	24	3.0	6.1

Exhibit 9-2.1

REFERENCE
SCS - TP - 61

U. S. DEPARTMENT OF AGRICULTURE
SOIL CONSERVATION SERVICE
ENGINEERING & WATERSHED PLANNING UNIT
UPPER DARBY, PENNSYLVANIA

RTSC - NE - ENG. 915

SHEET 3 OF 6

~~9-20.7~~

PARABOLIC DIVERSION DESIGN, WITHOUT FREEBOARD

RETARDANCE - D & C
GRADE, % - 1.0

V_1 Based on Permissible Velocity of the Soil With Retardance "D"
Top Width, Depth & V_2 Based on Retardance "C"

Q	V_1 = 2.0			V_1 = 2.5			V_1 = 3.0			V_1 = 3.5			V_1 = 4.0			V_1 = 4.5			V_1 = 5.0			V_1 = 5.5			V_1 = 6.0		
cfs	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2
15	13	1.1	1.5	8	1.3	2.0																					
20	18	1.1	1.5	11	1.3	2.1	8	1.5	2.6																		
25	22	1.1	1.5	14	1.3	2.1	9	1.5	2.6	8	1.6	3.0															
30	27	1.1	1.5	17	1.3	2.1	11	1.5	2.7	9	1.6	3.0															
35	31	1.1	1.5	19	1.3	2.2	13	1.5	2.8	11	1.6	3.1	8	1.8	3.6												
40	35	1.1	1.5	22	1.3	2.1	15	1.4	2.8	12	1.6	3.1	9	1.8	3.7												
45	40	1.1	1.5	25	1.3	2.2	17	1.5	2.8	13	1.6	3.2	10	1.8	3.7												
50	44	1.1	1.5	28	1.3	2.2	19	1.4	2.8	15	1.6	3.2	11	1.8	3.7	9	2.0	4.2									
55	48	1.1	1.5	30	1.3	2.2	20	1.4	2.8	16	1.5	3.3	12	1.8	3.8	10	2.0	4.3									
60	53	1.1	1.5	33	1.3	2.2	22	1.4	2.8	18	1.5	3.3	14	1.7	3.8	10	2.0	4.3									
65	57	1.1	1.5	36	1.3	2.2	24	1.4	2.8	19	1.5	3.3	15	1.7	3.8	11	2.0	4.3	9	2.2	4.7						
70	61	1.1	1.5	38	1.3	2.2	26	1.4	2.8	21	1.5	3.3	16	1.7	3.9	12	2.0	4.4	10	2.2	4.7						
75	66	1.1	1.5	41	1.3	2.2	28	1.4	2.9	22	1.5	3.3	17	1.7	3.9	13	2.0	4.5	11	2.2	4.7						
80	70	1.1	1.5	44	1.3	2.2	29	1.4	2.9	24	1.5	3.3	18	1.7	3.9	14	2.0	4.4	11	2.2	4.9						
90	79	1.1	1.5	49	1.3	2.2	33	1.4	2.9	27	1.5	3.3	20	1.7	3.9	15	1.9	4.5	13	2.2	4.9	11	2.4	5.2			
100	87	1.1	1.5	55	1.3	2.2	37	1.4	2.9	29	1.5	3.3	22	1.7	3.9	17	1.9	4.5	14	2.2	4.9	12	2.4	5.3			
110	96	1.1	1.5	60	1.3	2.2	40	1.4	2.9	32	1.5	3.3	24	1.7	3.9	19	1.9	4.5	15	2.1	5.0	13	2.4	5.3	11	2.6	5.7
120				65	1.3	2.2	44	1.4	2.9	35	1.5	3.3	27	1.7	4.0	20	1.9	4.6	17	2.1	5.0	14	2.4	5.4	12	2.6	5.7
130				71	1.3	2.2	47	1.4	2.9	38	1.5	3.3	29	1.7	4.0	22	1.9	4.6	18	2.1	5.0	15	2.4	5.4	13	2.6	5.8
140				76	1.3	2.2	51	1.4	2.9	41	1.5	3.3	31	1.7	4.0	24	1.9	4.6	20	2.1	5.0	16	2.3	5.5	14	2.6	5.8
150				81	1.3	2.2	55	1.4	2.9	44	1.5	3.3	33	1.7	4.0	25	1.9	4.6	21	2.1	5.1	17	2.4	5.5	15	2.6	5.8
160				87	1.3	2.2	58	1.4	2.9	47	1.5	3.3	35	1.7	4.0	27	1.9	4.6	22	2.1	5.1	19	2.3	5.5	16	2.5	6.0
170				92	1.3	2.2	62	1.4	2.9	50	1.5	3.3	38	1.7	4.0	29	1.9	4.6	24	2.1	5.1	20	2.3	5.7	17	2.5	5.9
180				97	1.3	2.2	65	1.4	2.9	53	1.5	3.4	40	1.7	4.0	30	1.9	4.6	25	2.1	5.1	21	2.3	5.6	18	2.5	5.9
190							69	1.4	2.9	55	1.5	3.4	42	1.7	4.0	32	1.9	4.6	26	2.1	5.1	22	2.3	5.6	19	2.5	6.0
200							72	1.4	2.9	58	1.5	3.4	44	1.7	4.0	34	1.9	4.7	28	2.1	5.1	23	2.3	5.6	20	2.5	6.0
220							80	1.4	2.9	64	1.5	3.4	48	1.7	4.0	37	1.9	4.6	31	2.1	5.1	25	2.3	5.6	22	2.5	6.1
240							87	1.4	2.9	70	1.5	3.4	53	1.7	4.0	40	1.9	4.7	33	2.1	5.1	28	2.3	5.7	24	2.5	6.1
260							94	1.4	2.9	76	1.5	3.4	57	1.7	4.0	44	1.9	4.7	36	2.1	5.1	30	2.3	5.4	26	2.5	6.1
280										81	1.5	3.4	61	1.7	4.0	47	1.9	4.7	39	2.1	5.1	32	2.3	5.6	28	2.5	6.2
300										87	1.5	3.4	66	1.7	4.0	50	1.9	4.7	42	2.1	5.1	34	2.3	5.7	30	2.5	6.1

Exhibit 9-2.1

REFERENCE
SCS - TP - 61

U. S. DEPARTMENT OF AGRICULTURE
SOIL CONSERVATION SERVICE
ENGINEERING & WATERSHED PLANNING UNIT
UPPER DARBY, PENNSYLVANIA

RTSC - NE - ENG.
915
SHEET 4 OF 6

PARABOLIC DIVERSION DESIGN, WITHOUT FREEBOARD

RETARDANCE - D & C
GRADE, % - 1.5

V_1 Based on Permissible Velocity of the Soil With Retardance "D"
Top Width, Depth & V_2 Based on Retardance "C"

Q	V_1 = 2.0			V_1 = 2.5			V_1 = 3.0			V_1 = 3.5			V_1 = 4.0			V_1 = 4.5			V_1 = 5.0			V_1 = 5.5			V_1 = 6.0		
cfs	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2
15	17	0.9	1.4	11	1.1	1.9	8	1.2	2.4																		
20	23	0.9	1.4	15	1.0	1.9	10	1.2	2.5	7	1.4	3.0	6	1.5	3.4												
25	28	0.9	1.4	19	1.0	1.9	12	1.2	2.6	8	1.4	3.2	7	1.5	3.6												
30	34	0.9	1.4	22	1.0	1.9	15	1.2	2.6	10	1.3	3.2	8	1.5	3.6	7	1.6	4.0									
35	40	0.9	1.4	26	1.0	2.0	17	1.1	2.6	12	1.3	3.3	10	1.4	3.7	8	1.6	4.1									
40	45	0.9	1.4	30	1.0	1.9	20	1.2	2.6	14	1.3	3.3	11	1.4	3.7	9	1.6	4.2	7	1.8	4.6						
45	51	0.9	1.4	33	1.0	2.0	22	1.1	2.6	15	1.3	3.4	12	1.4	3.8	10	1.5	4.3	8	1.8	4.6						
50	56	0.9	1.4	37	1.0	2.0	25	1.1	2.7	17	1.3	3.4	14	1.4	3.9	11	1.5	4.3	9	1.8	4.8						
55	62	0.9	1.5	41	1.0	2.0	27	1.1	2.6	19	1.3	3.4	15	1.4	3.9	12	1.5	4.3	10	1.7	4.9	8	1.9	5.1			
60	67	0.9	1.5	44	1.0	2.0	30	1.1	2.7	20	1.3	3.4	16	1.4	3.9	14	1.5	4.4	11	1.7	4.9	9	1.9	5.2			
65	73	0.9	1.5	48	1.0	2.0	32	1.1	2.7	22	1.3	3.4	18	1.4	3.9	15	1.5	4.4	11	1.7	5.0	10	1.9	5.3			
70	78	0.9	1.5	51	1.0	2.0	34	1.1	2.7	24	1.3	3.4	19	1.4	3.9	16	1.5	4.4	12	1.7	4.9	10	1.9	5.4	9	2.1	5.6
75	83	0.9	1.5	55	1.0	2.0	37	1.1	2.7	25	1.3	3.4	21	1.4	3.9	17	1.5	4.4	13	1.7	5.0	11	1.9	5.4	9	2.1	5.6
80	89	0.9	1.5	59	1.0	2.0	39	1.1	2.7	27	1.3	3.4	22	1.4	3.9	18	1.5	4.4	14	1.7	5.0	12	1.9	5.5	10	2.1	5.8
90	100	0.9	1.5	66	1.0	2.0	44	1.1	2.7	30	1.3	3.5	25	1.4	3.9	20	1.5	4.4	16	1.7	5.0	13	1.9	5.4	11	2.0	5.9
100				73	1.0	2.0	49	1.1	2.7	33	1.3	3.5	27	1.4	3.9	22	1.5	4.5	17	1.7	5.1	15	1.9	5.5	12	2.0	6.0
110				80	1.0	2.0	54	1.1	2.7	37	1.3	3.5	30	1.4	3.9	25	1.5	4.5	19	1.7	5.1	16	1.8	5.6	14	2.0	6.0
120				87	1.0	2.0	58	1.1	2.7	40	1.3	3.5	33	1.4	4.0	27	1.5	4.5	21	1.7	5.1	18	1.9	5.5	15	2.0	6.0
130				95	1.0	2.0	63	1.1	2.7	43	1.3	3.5	35	1.4	3.9	29	1.5	4.5	22	1.7	5.1	19	1.8	5.6	16	2.0	6.1
140							68	1.1	2.7	47	1.3	3.5	38	1.4	4.0	31	1.5	4.5	24	1.7	5.2	20	1.8	5.6	17	2.0	6.1
150							73	1.1	2.7	50	1.3	3.5	41	1.4	4.0	33	1.5	4.5	26	1.7	5.2	22	1.8	5.6	18	2.0	6.1
160							78	1.1	2.7	53	1.3	3.5	43	1.4	4.0	36	1.5	4.5	27	1.7	5.2	23	1.8	5.6	20	2.0	6.1
170							82	1.1	2.7	56	1.3	3.5	46	1.4	4.0	38	1.5	4.5	29	1.7	5.2	25	1.8	5.6	21	2.0	6.1
180							87	1.1	2.7	60	1.3	3.5	49	1.4	4.0	40	1.5	4.5	31	1.7	5.2	26	1.8	5.7	22	2.0	6.1
190							92	1.1	2.7	63	1.3	3.5	51	1.4	4.0	42	1.5	4.5	33	1.7	5.2	27	1.8	5.7	23	2.0	6.2
200							97	1.1	2.7	66	1.3	3.5	54	1.4	4.0	44	1.5	4.5	34	1.7	5.2	29	1.8	5.6	24	2.0	6.2
220										73	1.3	3.5	59	1.4	4.0	49	1.5	4.5	38	1.7	5.2	32	1.8	5.7	27	2.0	6.2
240										79	1.3	3.5	65	1.4	4.0	53	1.5	4.5	41	1.7	5.2	35	1.8	5.7	29	2.0	6.2
260										86	1.3	3.5	70	1.4	4.0	57	1.5	4.5	44	1.7	5.2	37	1.8	5.7	32	2.0	6.2
280										92	1.3	3.5	75	1.4	4.0	62	1.5	4.5	48	1.7	5.2	40	1.8	5.7	34	2.0	6.2
300										99	1.3	3.5	81	1.4	4.0	66	1.5	4.5	51	1.7	5.2	43	1.8	5.7	36	2.0	6.2

Exhibit 9-2.1

9-20-9

REFERENCE
SCS - TP - 61

U. S. DEPARTMENT OF AGRICULTURE
SOIL CONSERVATION SERVICE
ENGINEERING & WATERSHED PLANNING UNIT
UPPER DARBY, PENNSYLVANIA

RTSC - NE - ENG.
915
SHEET 5 OF 6

PARABOLIC DIVERSION DESIGN, WITHOUT FREEBOARD

RETARDANCE - D & C
GRADE, % - 2.0

V_1 Based on Permissible Velocity of the Soil With Retardance "D"
Top Width, Depth & V_2 Based on Retardance "C"

Q	V_1 = 2.0			V_1 = 2.5			V_1 = 3.0			V_1 = 3.5			V_1 = 4.0			V_1 = 4.5			V_1 = 5.0			V_1 = 5.5			V_1 = 6.0		
cfs	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2	T	D	V_2
15	21	0.8	1.3	13	0.9	1.9	9	1.0	2.4	7	1.2	2.9															
20	28	0.8	1.3	17	0.9	1.9	12	1.0	2.4	9	1.1	3.0	7	1.3	3.5	5	1.4	3.8									
25	35	0.8	1.3	21	0.9	1.9	15	1.0	2.4	11	1.1	3.0	8	1.3	3.7	7	1.4	4.0									
30	41	0.8	1.3	26	0.9	1.9	18	1.0	2.5	13	1.1	3.0	10	1.2	3.7	8	1.3	4.2	7	1.5	4.5						
35	48	0.8	1.4	30	0.9	1.9	22	1.0	2.4	15	1.1	3.1	11	1.2	3.8	9	1.3	4.2	8	1.5	4.7						
40	55	0.8	1.3	34	0.9	1.9	25	1.0	2.5	18	1.1	3.1	13	1.2	3.8	11	1.3	4.3	9	1.5	4.7	7	1.7	5.0			
45	62	0.8	1.4	38	0.9	1.9	28	1.0	2.5	20	1.1	3.1	14	1.2	3.8	12	1.3	4.3	10	1.4	4.8	8	1.6	5.2			
50	68	0.8	1.4	42	0.9	1.9	31	1.0	2.5	22	1.1	3.1	16	1.2	3.9	13	1.3	4.3	11	1.4	4.8	9	1.6	5.3	8	1.7	5.6
55	75	0.8	1.4	46	0.9	1.9	34	1.0	2.5	24	1.1	3.1	17	1.2	3.8	14	1.3	4.3	12	1.4	4.9	10	1.6	5.3	8	1.7	5.8
60	82	0.8	1.4	51	0.9	1.9	37	1.0	2.5	26	1.1	3.1	19	1.2	3.9	16	1.3	4.4	13	1.4	4.8	11	1.6	5.3	9	1.7	5.7
65	88	0.8	1.4	55	0.9	1.9	40	1.0	2.5	28	1.1	3.1	21	1.2	3.9	17	1.3	4.4	14	1.4	4.9	11	1.6	5.4	10	1.7	5.7
70	95	0.8	1.4	59	0.9	1.9	43	1.0	2.5	30	1.1	3.1	22	1.2	3.9	18	1.3	4.4	15	1.4	4.9	12	1.6	5.4	10	1.7	5.8
75				63	0.9	1.9	46	1.0	2.5	32	1.1	3.2	24	1.2	3.9	20	1.3	4.4	16	1.4	5.0	13	1.6	5.5	11	1.7	5.9
80				67	0.9	2.0	48	1.0	2.5	35	1.1	3.1	25	1.2	3.9	21	1.3	4.4	17	1.4	4.9	14	1.6	5.4	12	1.7	6.0
90				75	0.9	2.0	54	1.0	2.5	39	1.1	3.2	28	1.2	3.9	23	1.3	4.4	19	1.4	4.9	16	1.6	5.5	13	1.7	5.9
100				83	0.9	2.0	60	1.0	2.5	43	1.1	3.2	31	1.2	3.9	26	1.3	4.4	21	1.4	5.0	17	1.6	5.5	15	1.7	6.0
110				92	0.9	2.0	66	1.0	2.5	47	1.1	3.2	34	1.2	3.9	28	1.3	4.4	23	1.4	5.0	19	1.5	5.6	16	1.7	6.0
120				100	0.9	2.0	72	1.0	2.5	52	1.1	3.2	38	1.2	3.9	31	1.3	4.4	26	1.4	5.0	21	1.5	5.6	18	1.7	6.1
130							78	1.0	2.5	56	1.1	3.2	41	1.2	3.9	34	1.3	4.5	28	1.4	5.0	23	1.5	5.6	19	1.7	6.0
140							84	1.0	2.5	60	1.1	3.2	44	1.2	4.0	36	1.3	4.5	30	1.4	5.0	24	1.5	5.6	21	1.7	6.1
150							90	1.0	2.5	64	1.1	3.2	47	1.2	4.0	39	1.3	4.5	32	1.4	5.0	26	1.5	5.6	22	1.7	6.1
160							96	1.0	2.5	69	1.1	3.2	50	1.2	4.0	41	1.3	4.5	34	1.4	5.1	28	1.5	5.6	23	1.7	6.1
170										73	1.1	3.2	53	1.2	4.0	44	1.3	4.5	36	1.4	5.1	29	1.5	5.7	25	1.7	6.1
180										77	1.1	3.2	56	1.2	4.0	46	1.3	4.5	38	1.4	5.0	31	1.5	5.7	26	1.7	6.1
190										81	1.1	3.2	59	1.2	4.0	49	1.3	4.5	40	1.4	5.0	33	1.5	5.7	28	1.7	6.1
200										85	1.1	3.2	62	1.2	4.0	51	1.3	4.5	42	1.4	5.0	34	1.5	5.7	29	1.7	6.2
220										94	1.1	3.2	68	1.2	4.0	56	1.3	4.5	46	1.4	5.1	38	1.5	5.7	32	1.7	6.2
240													74	1.2	4.0	61	1.3	4.5	51	1.4	5.1	41	1.5	5.7	35	1.7	6.2
260													80	1.2	4.0	66	1.3	4.5	55	1.4	5.1	45	1.5	5.7	38	1.7	6.2
280													86	1.2	4.0	71	1.3	4.5	59	1.4	5.1	48	1.5	5.7	41	1.7	6.2
300													92	1.2	4.0	76	1.3	4.5	63	1.4	5.1	51	1.5	5.7	44	1.7	6.2

Exhibit 9-2.1

9-20-10

REFERENCE
SCS - TP - 61

U. S. DEPARTMENT OF AGRICULTURE
SOIL CONSERVATION SERVICE
ENGINEERING & WATERSHED PLANNING UNIT
UPPER DARBY, PENNSYLVANIA

RTSC - NE - ENG. 915

SHEET 6 OF 6

USDA-SCS-HYATTSVILLE, MD. 1971