




PA-018D 2' high, 8" L-wall (without surcharge)
Standard Drawings Folder

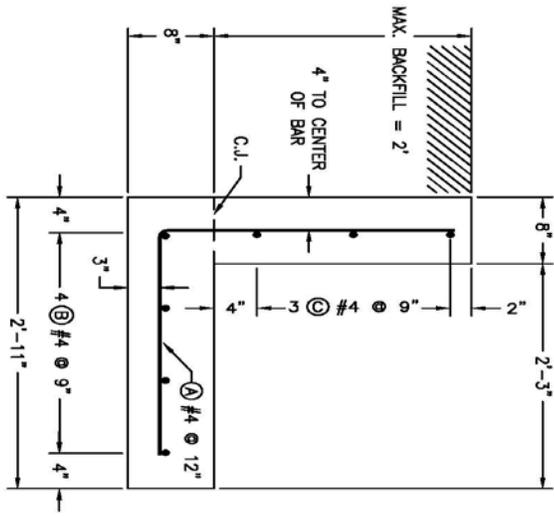

- C.L. = CONSTRUCTION JOINT
- LIQUID-TIGHT JOINT — YES — NO
- LIQUID-TIGHT JOINT OPTIONS
- NON-METALLIC WATERSTOP (PVC)
 - HYDROPHILIC WATERSTOP



- CONSTRUCTION JOINT OPTIONS
- IF SLAB AND WALL ARE POURED SEPARATELY, THE SLAB SURFACE MUST BE THOROUGHLY CLEANED WITH WATER AND A WIRE BRUSH. THE SURFACE OF THE JOINT SHALL BE KEPT MOIST FOR AT LEAST 1 HOUR PRIOR TO PLACEMENT OF NEW CONCRETE.
 - THE SLAB AND WALL MAY BE POURED AT THE SAME TIME ELIMINATING THE NEED FOR A CONSTRUCTION JOINT.



SLAB CORNER DETAILS
RESTRAINING SLAB OPTIONS
SEE PA-023
SEE PA-024

- GENERAL DESIGN NOTES:
- GRANAGE SHALL BE AWAY FROM THE WALL.
 - THE MINIMUM WIDTH OF THE BACKFILL AGAINST THE WALL SHALL BE EQUAL TO OR GREATER THAN THE BACKFILL HEIGHT.
 - MAXIMUM FOOTING CONTACT PRESSURE IS 510 psf/ft.

DESIGN STRENGTHS, WORKING STRESS DESIGN

- CONCRETE $f_c = 4,000$ psi
- STEEL $f_s = 20,000$ psi (GRADE 40)

- WALL DESIGN LOADINGS, 313 STANDARD - LATERAL EARTH PRESSURE VALUES, SEE SECTION IV OF THE FIELD OFFICE TECHNICAL GUIDE.
- MANURE LOAD INSIDE = 65 psf/ft.
 - SOIL BACKFILL LOAD OUTSIDE = 75 psf/ft.
 - NO SURCHARGE LOAD
 - SOIL BACKFILL DENSITY = 110 pcf.
 - WATER TABLE MUST BE BELOW THE FOOTING ELEVATION

WALL RESTRAINT REQUIREMENTS:

- 5" THICK SLAB, SAFETY FACTOR AGAINST SLIDING 1.5 MIN.

BACKFILL HEIGHT (OUTSIDE LOAD)	SLAB LENGTH (NO INSIDE LOAD)	SLAB LENGTH (FULL INSIDE LOAD)
2 FEET	5 FEET	NO SLAB
1 FOOT	NO SLAB	NO SLAB
0 FEET	NO SLAB	NO SLAB

THIS STANDARDIZED DESIGN MUST BE ADAPTED TO THE SPECIFIC SITE. IT WAS DEVELOPED IN COOPERATION WITH THE WISCONSIN DEPARTMENT OF AGRICULTURAL, TRADE AND CONSUMER PROTECTION. THE DESIGN FOLDER IS FILED AT THE INROS STATE OFFICE, 8030 EXCELSIOR DRIVE, MADISON, WI 53717-2906

(ADAPTED FROM WI-523, APRIL 2005)

TYPE 2 BAR

STEEL SCHEDULE

MARK	SIZE	QUAN	TYPE	R	S	LENGTH	TOTAL LENGTH
A	4	2	2'-3"	2'-3"	4'-6"		
B	4		SIR				
C	4		SIR				
L	4	2	2'-0"	2'-0"	4'-0"		

#4 BARS, TOTAL LENGTH

ESTIMATED QUANTITIES

CONCRETE (0.1214 CU.YDS./LIN.FT.) _____ CU.YDS.

STEEL #4 (0.668 LBS./FT.) _____ LBS.

CONCRETE SHALL MEET PA 313 OR 561 SPECIFICATION REQUIREMENTS.

SUBSTITUTION OF GRADE 60 BARS IS PERMITTED.

MINIMUM SPICE LENGTH FOR MARK (A) AND (C) BARS IS 12"

STEEL QUANTITY DOES NOT INCLUDE SPICE LENGTHS.

TOTAL LENGTH OF WALL _____ FT.

- NOTES:
- DIMENSIONS ARE TO THE REINFORCING BAR SURFACE UNLESS OTHERWISE NOTED.
 - BACKFILL TO THE TOP OF THE WALL IS RECOMMENDED FOR FROST PROTECTION.

Date: 06/23/05

Drawn: TJA

Checked:

Approved by:

_____ COUNTY, PENNSYLVANIA

2' HIGH, 8" L-WALL (W/O SURCHARGE)



PA-018D
06/23/05 1:38
24-918