
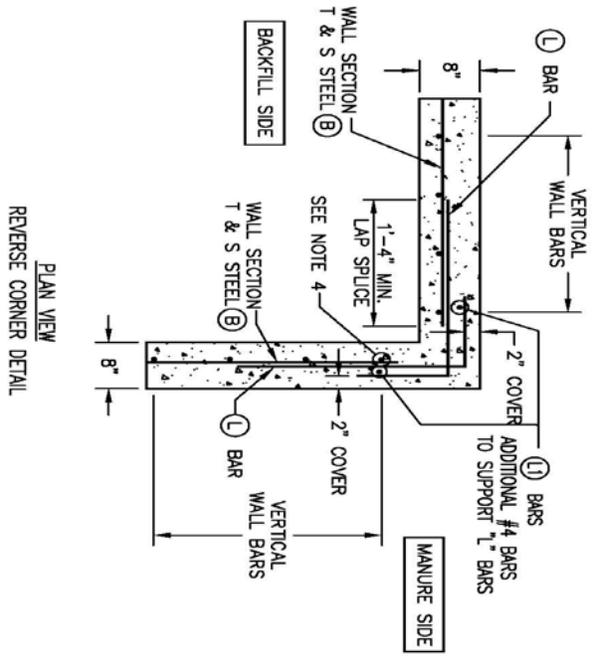


- NOTES:
1. THE LONG LEG OF MARK (L) CORNER BAR TO WALL SECTION T&S MARK (B) BAR AS SHOWN.
 2. SHORT LEG OF MARK (L) BARS SHALL BE SUPPORTED WITH VERTICAL WALL SUPPORT BAR (1).
 3. 10 MARK (L) BARS PER CORNER. SEE APPROPRIATE WALL DRAWING FOR BAR DIMENSIONS AND QUANTITIES.
 4. PLACE FIRST VERTICAL BAR (SEE PLAN VIEW) AT WALL CORNER, OR NO FARTHER THAN ONE-HALF THE VERTICAL BAR SPACING FROM THE CORNER.

THIS STANDARDIZED DESIGN MUST BE ADAPTED TO THE SPECIFIC SITE. IT WAS DEVELOPED IN COOPERATION WITH THE WISCONSIN DNR. THE DESIGN FOLDER IS LOCATED AT THE NRCS STATE OFFICE, 8030 EXCELSIOR DRIVE, MADISON, WI, 53717-2906

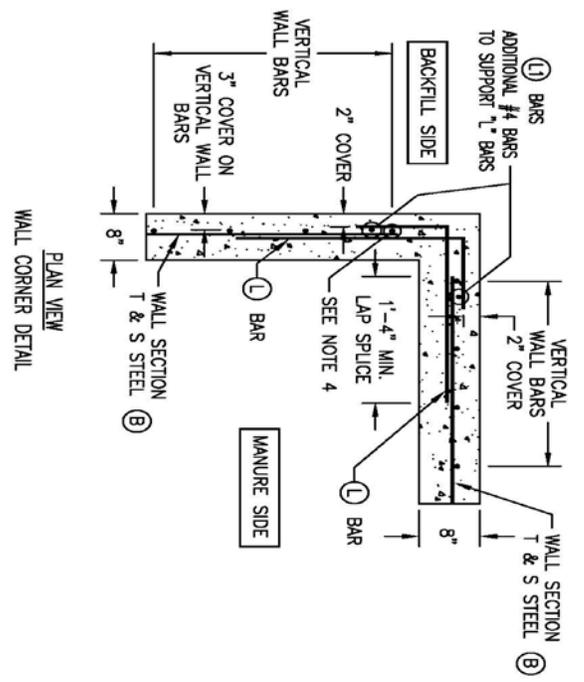

(ADAPTED FROM WI-572, APRIL 2005)