


PA-022E 6' high, T-wall (with surcharge)
Standard Drawings Folder

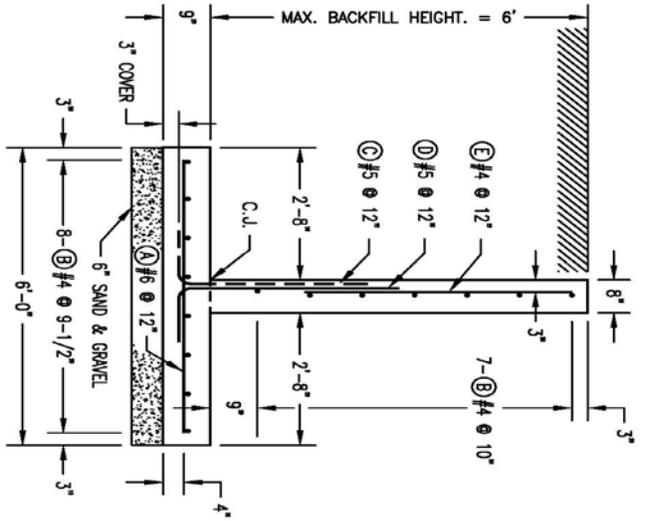

- NOTES:
1. SPlice MARK (D) AND MARK (E) BARS.
2. PLACE (C) BAR @ 6" SPACING FROM (D) BAR.

STEEL SCHEDULE

MARK	SIZE	QUAN	TYPE	R	S	LENGTH	TOTAL LENGTH
A	6	---	STR	---	---	5'-6"	
B	4	---	STR	---	---	4'-0"	
C	5	2	STR	---	---	3'-0"	
D	5	2	STR	---	---	1'-0"	
E	4	2	STR	---	---	4'-3"	
L	5	2	STR	---	---	1'-0"	
L1	5	---	STR	---	---	5'-9"	

ESTIMATED QUANTITIES


CONCRETE (0.32 CU.YDS./LIN.FT.)	CU. YDS.
STEEL #4 (20.3 FT./LIN. FT.)	FT.
STEEL #5 (8.5 FT./LIN. FT.)	FT.
STEEL #6 (5.5 FT./LIN. FT.)	FT.
STEEL (74.5 FT./CORNER)	FT.

- CONCRETE SHALL MEET PA 313 OR 561 SPECIFICATION REQUIREMENTS.
MINIMUM SPlice LENGTH FOR ALL #4 BARS IS 16".
MINIMUM SPlice LENGTH FOR ALL #5 BARS IS 17".
MINIMUM SPlice LENGTH FOR ALL #6 BARS IS 20".
STEEL QUANTITY DOES NOT INCLUDE SPlice LENGTHS.
SUBSTITUTION OF GRADE 60 BARS IS PERMITTED.

TOTAL LENGTH OF WALL _____ FT.

- NOTES:
1. NO MINIMUM OF BACKFILL IS REQUIRED, BUT A 2-FOOT BACKFILL IS RECOMMENDED FOR FROST PROTECTION.
2. DIMENSIONS ARE TO THE REINFORCING BAR SURFACE.

- C.L. = CONSTRUCTION JOINT
LIQUID-TIGHT JOINT — YES — NO
LIQUID-TIGHT JOINT OPTIONS
1) NON-METALLIC WATERSTOP (PVC)
2) HYDROPHILIC WATERSTOP



- CONSTRUCTION JOINT OPTIONS
1. IF SLAB AND WALL ARE POURED SEPARATELY, THE SLAB SURFACE MUST BE THOROUGHLY CLEANED WITH WATER AND A WIRE BRUSH. THE SURFACE OF THE JOINT SHALL BE KEPT MOIST FOR AT LEAST 1 HOUR PRIOR TO PLACEMENT OF NEW CONCRETE.
2. THE SLAB AND WALL MAY BE POURED AT THE SAME TIME ELIMINATING THE NEED FOR A CONSTRUCTION JOINT.

6-FOOT WALL CORNER DETAILS SEE PA-027B
SLAB CORNER DETAILS SEE PA-023
RESTRAINING SLAB OPTIONS SEE PA-024

- GENERAL DESIGN NOTES:
• DRAINAGE SHALL BE AWAY FROM THE WALL.
• THE MINIMUM TOP WIDTH OF THE BACKFILL AGAINST THE WALL SHALL BE EQUAL TO OR GREATER THAN THE BACKFILL HEIGHT.
• MAXIMUM FOOTING CONTACT PRESSURE IS 1180 psf/ft.

DESIGN STRENGTHS: WORKING STRESS DESIGN
CONCRETE $f_c = 4,000$ psi STEEL $f_s = 20,000$ psi (GRADE 40)
WALL DESIGN LOADING: 313 STANDARD - LATERAL EARTH PRESSURE VALUES, SEE SECTION IV OF THE FIELD OFFICE TECHNICAL GUIDE.

- MANURE LOAD INSIDE = 65 psf/ft.
• SOIL BACKFILL LOAD OUTSIDE = 60 psf/ft.
• 120 psf HORIZONTAL SURCHARGE OR A 2.5:1 SLOPING BACKFILL IS ALLOWED.
• SOIL BACKFILL DENSITY = 110 pcf.
• WATER TABLE MUST BE BELOW THE FOOTING ELEVATION

WALL RESTRAINT REQUIREMENTS:
• 5" THICK SLAB, SAFETY FACTOR AGAINST SLIDING 1.5 MIN.

BACKFILL HEIGHT (OUTSIDE LOAD)	SLAB LENGTH NO INSIDE LOAD	SLAB LENGTH FULL INSIDE LOAD
6 FEET	56 FEET	NO SLAB
5 FEET	37 FEET	NO SLAB
4 FEET	21 FEET	NO SLAB
3 FEET	7 FEET	5 FEET **
2 FEET	NO SLAB	5 FEET **
1 FOOT	NO SLAB	5 FEET **
0 FEET	NO SLAB	5 FEET **

- ** MINIMUM SLAB LENGTH OF 5 FEET REQUIRED AND MUST BE TIED INTO THE WALL FOOTING.
SLAB POURED WITH WALL FOOTING:
#3 BARS @ 18" SPACING.
SLAB NOT POURED WITH WALL FOOTING:
#3 DOWEL BARS - 3'-0" LENGTH @ 2'-0" SPACING.

THIS STANDARDIZED DESIGN MUST BE ADAPTED TO THE SPECIFIC SITE. IT WAS DEVELOPED IN COOPERATION WITH THE WISCONSIN DEPARTMENT OF AGRICULTURE, TRADE AND CONSUMER PROTECTION. THE DESIGN FOLDER IS FILED AT THE NRCS STATE OFFICE, 8030 EXCELSIOR DRIVE, MADISON, WISCONSIN 53717-2906

(ADAPTED FROM WI-564, APRIL 2005)



_____ COUNTY, PENNSYLVANIA
6' HIGH, 8" T-WALL (W/SURCHARGE)

Date: 06/23/05
Drawn: TJA
Checked:
Approved by: